


O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)

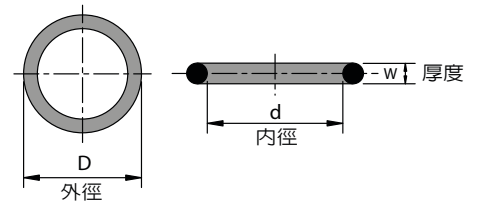

材質	JIS 記號	1種 A	1種 B	3種	4種 C	4種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09209.3-3.1	209.3	215.5	3.1	Gs-210
	02210	209.3	220.7	5.7	G-210
*	04210	209.5	213.5	2	S-210
	01210	209.5	226.3	8.4	P-210
*	09210-1.5	210	213	1.5	
*	09210-2	210	214	2	
*	09210-3	210	216	3	
*	09210-4	210	218	4	
*	09210-5	210	220	5	Gm-210
*	09210-6	210	222	6	
*	09210-8	210	226	8	
*	09210-10	210	230	10	
*	09211.02-7	211.02	225.02	7	
*	09212-6	212	224	6	
*	09213-4	213	221	4	V-215
*	09214-3	214	220	3	
*	09214.3-3.1	214.3	220.5	3.1	Gs-215
*	02215	214.3	225.7	5.7	G-215
*	04215	214.5	218.5	2	S-215
	01215	214.5	231.3	8.4	P-215
*	09215-2	215	219	2	
*	09215-2.5	215	220	2.5	
*	09215-3	215	221	3	
*	09215-4	215	223	4	
*	09215-4.5	215	224	4.5	
*	09215-5	215	225	5	Gm-215
*	09215-6	215	227	6	
*	09215-8	215	231	8	
	08371	215.27	225.93	5.33	AS-371
	08446	215.27	229.25	6.99	AS-446
	08268	215.5	222.56	3.53	AS-268
	08173	215.57	220.81	2.62	AS-173
*	09216-3	216	222	3	
*	09217-5	217	227	5	
*	09217-10	217	237	10	
*	09218-2	218	222	2	
*	09218-2.5	218	223	2.5	
*	09218-4	218	226	4	V-220
*	09219.3-3.1	219.3	225.5	3.1	Gs-220
	02220	219.3	230.7	5.7	G-220

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	04220	219.5	223.5	2	S-220
	01220	219.5	236.3	8.4	P-220
*	09220-1	220	222	1	
*	09220-2	220	224	2	
*	09220-2.5	220	225	2.5	
*	09220-3	220	226	3	
*	09220-4	220	228	4	
*	09220-4.5	220	229	4.5	
*	09220-5	220	230	5	Gm-220
*	09220-6	220	232	6	
*	09220-8	220	236	8	
*	09220-10	220	240	10	
*	09220-14	220	248	14	
*	09220.3-1.5	220.3	223.3	1.5	
*	09221-7	221	235	7	
	08372	221.62	232.28	5.33	AS-372
*	09221.69-7	221.69	235.69	7	
	08269	221.85	228.91	3.53	AS-269
	08174	221.92	227.16	2.62	AS-174
*	09222-4	222	230	4	
	09222.5-6	222.5	234.5	6	V-225
*	09224.3-3.1	224.3	230.5	3.1	Gs-225
*	02225	224.3	235.7	5.7	G-225
*	04225	224.5	228.5	2	S-225
	01225	224.5	241.3	8.4	P-225
*	09225-2	225	229	2	
*	09225-2.5	225	230	2.5	
*	09225-3	225	231	3	
*	09225-3.5	225	232	3.5	
*	09225-4	225	233	4	
*	09225-5	225	235	5	Gm-225
*	09225-6	225	237	6	
*	09225-7	225	239	7	
*	09225-8	225	241	8	
*	09225-10	225	245	10	
*	09225-11	225	247	11	
*	09225.5-5	225.5	235.5	5	
*	09226.5-13	226.5	252.5	13	
*	09227.5-6	227.5	239.5	6	V-230
	08373	227.97	238.63	5.33	AS-373

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)



材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
08447	227.97	241.95	6.99	AS-447
* 09228-3	228	234	3	
* 09228-4	228	236	4	
* 09228-4.5	228	237	4.5	
08270	228.2	235.26	3.53	AS-270
08175	228.27	233.51	2.62	AS-175
* 09229.3-3.1	229.3	235.5	3.1	Gs-230
02230	229.3	240.7	5.7	G-230
* 04230	229.5	233.5	2	S-230
01230	229.5	246.3	8.4	P-230
* 09230-2	230	234	2	
* 09230-2.5	230	235	2.5	
* 09230-3	230	236	3	
* 09230-4	230	238	4	
* 09230-5	230	240	5	Gm-230
* 09230-5.34	230	240.68	5.34	
* 09230-6	230	242	6	
* 09230-6.5	230	243	6.5	
* 09230-8	230	246	8	
* 09230-10	230	250	10	
* 09230-12	230	254	12	
* 09230.5-5.34	230.5	241.18	5.34	
* 09231-1.78	231	234.56	1.78	
* 09232-6	232	244	6	
* 09232.5-6	232.5	244.5	6	V-235
* 09233-3	233	239	3	
* 09234-7	234	248	7	
* 09234.3-3.1	234.3	240.5	3.1	Gs-235
* 02235	234.3	245.7	5.7	G-235
08374	234.32	244.98	5.33	AS-374
* 04235	234.5	238.5	2	S-235
01235	234.5	251.3	8.4	P-235
08271	234.55	241.61	3.53	AS-271
08176	234.62	239.86	2.62	AS-176
* 09235-2	235	239	2	
* 09235-2.5	235	240	2.5	
* 09235-3	235	241	3	
* 09235-4	235	243	4	
* 09235-5	235	245	5	Gm-235
* 09235-6	235	247	6	


加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
* 09235-8	235	251	8	
* 09235-10	235	255	10	
* 09236-3	236	242	3	
* 09236-7	236	250	7	
* 09237.5-6	237.5	249.5	6	V-240
* 09238-3	238	244	3	
* 09238-5	238	248	5	
* 09238-6	238	250	6	
* 09239-4	239	247	4	
* 09239-5	239	249	5	
* 09239.3-3.1	239.3	245.5	3.1	Gs-240
02240	239.3	250.7	5.7	G-240
* 04240	239.5	243.5	2	S-240
01240	239.5	256.3	8.4	P-240
* 09240-2	240	244	2	
* 09240-2.5	240	245	2.5	
* 09240-3	240	246	3	
* 09240-4	240	248	4	
* 09240-4.5	240	249	4.5	
* 09240-5	240	250	5	Gm-240
* 09240-6	240	252	6	
* 09240-8	240	256	8	
* 09240-10	240	260	10	
08375	240.67	251.33	5.33	AS-375
08448	240.67	254.65	6.99	AS-448
08272	240.9	247.96	3.53	AS-272
08177	240.97	246.21	2.62	AS-177
* 09242.5-6	242.5	254.5	6	V-245
* 09243-3	243	249	3	
* 09243-4	243	251	4	
* 09243-13	243	269	13	
* 09244.3-3.1	244.3	250.5	3.1	Gs-245
* 02245	244.3	255.7	5.7	G-245
* 04245	244.5	248.5	2	S-245
01245	244.5	261.3	8.4	P-245
* 09245-1.5	245	248	1.5	
* 09245-2.5	245	250	2.5	
* 09245-3	245	251	3	
* 09245-3.5	245	252	3.5	
* 09245-4	245	253	4	

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)



O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)

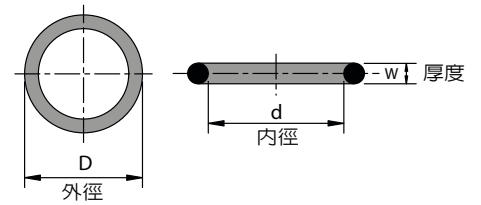

材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09245-5	245	255	5	Gm-245
*	09245-6	245	257	6	
*	09245-8	245	261	8	
*	09245-10	245	265	10	
*	09246-2	246	250	2	
*	09247-7	247	261	7	
	08376	247.02	257.68	5.33	AS-376
	08273	247.25	254.31	3.53	AS-273
	08178	247.32	252.56	2.62	AS-178
*	09247.5-6	247.5	259.5	6	V-250
*	09248-5	248	258	5	
*	09249.3-3.1	249.3	255.5	3.1	Gs-250
	02250	249.3	260.7	5.7	G-250
*	04250	249.5	253.5	2	S-250
	01250	249.5	266.3	8.4	P-250
*	09249.53-1.78	249.53	253.09	1.78	
*	09250-2	250	254	2	
*	09250-2.5	250	255	2.5	
*	09250-3	250	256	3	
*	09250-4	250	258	4	
*	09250-4.5	250	259	4.5	
*	09250-5	250	260	5	Gm-250
*	09250-5.3	250	260.6	5.3	
*	09250-6	250	262	6	
*	09250-8	250	266	8	
*	09250-10	250	270	10	
*	09252.5-6	252.5	264.5	6	V-255
	08377	253.37	264.03	5.33	AS-377
	08449	253.37	267.35	6.99	AS-449
*	09253.59-1.78	253.59	257.15	1.78	
	08274	253.6	260.66	3.53	AS-274
*	09254.3-3.1	254.3	260.5	3.1	Gs-255
*	02255	254.3	265.7	5.7	G-255
*	04255	254.5	258.5	2	S-255
	01255	254.5	271.3	8.4	P-255
*	09255-2	255	259	2	
*	09255-2.5	255	260	2.5	
*	09255-3	255	261	3	
*	09255-4	255	263	4	
*	09255-5	255	265	5	Gm-255

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09255-6	255	267	6	
*	09255-11	255	277	11	
*	09256-5	256	266	5	
*	09257-3.5	257	264	3.5	
*	09257.5-6	257.5	269.5	6	V-260
*	09258-5	258	268	5	
*	09259.3-3.1	259.3	265.5	3.1	Gs-260
	02260	259.3	270.7	5.7	G-260
*	04260	259.5	263.5	2	S-260
	01260	259.5	276.3	8.4	P-260
*	09259.7-7	259.7	273.7	7	
*	09260-2	260	264	2	
*	09260-2.5	260	265	2.5	
*	09260-3	260	266	3	
*	09260-4	260	268	4	
*	09260-4.5	260	269	4.5	
*	09260-5	260	270	5	Gm-260
*	09260-6	260	272	6	
*	09260-10	260	280	10	
*	09261-2.5	261	266	2.5	
*	09262.5-6	262.5	274.5	6	V-265
*	09263-3	263	269	3	
*	09263-7	263	277	7	
*	09263.45-2.64	263.45	268.73	2.64	
*	09264-3	264	270	3	
*	09264-3.5	264	271	3.5	
*	09264.3-3.1	264.3	270.5	3.1	Gs-265
*	02265	264.3	275.7	5.7	G-265
*	04265	264.5	268.5	2	S-265
	01265	264.5	281.3	8.4	P-265
*	09265-1.5	265	268	1.5	
*	09265-2	265	269	2	
*	09265-3	265	271	3	
*	09265-4	265	273	4	
*	09265-5	265	275	5	Gm-265
*	09265-6	265	277	6	
*	09265-8	265	281	8	
*	09266-2.5	266	271	2.5	
	08378	266.07	276.73	5.33	AS-378
	08450	266.07	280.05	6.99	AS-450

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)