



材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09485.4-8	485.4	501.4	8	
*	09487-5	487	497	5	
*	09489-6	489	501	6	
*	09489.3-3.1	489.3	495.5	3.1	Gs-490
*	02490	489.3	500.7	5.7	G-490
*	01490	489.5	506.3	8.4	P-490
*	09490-3	490	496	3	
*	09490-4	490	498	4	
*	09490-5	490	500	5	
*	09490-8	490	506	8	
*	09490-9	490	508	9	
*	09490-12	490	514	12	
*	09491-3	491	497	3	
*	09491-9	491	509	9	
*	09492.5-6	492.5	504.5	6	
*	09493-4	493	501	4	
	08468	494.16	508.14	6.99	AS-468
*	09494.3-3.1	494.3	500.5	3.1	Gs-495
*	02495	494.3	505.7	5.7	G-495
*	01495	494.5	511.3	8.4	P-495
*	09494.5-10	494.5	514.5	10	V-500
*	09494.9-8	494.9	510.9	8	
*	09495-3	495	501	3	
*	09495-4	495	503	4	
*	09495-5	495	505	5	
*	09495-6	495	507	6	
*	09495-8	495	511	8	
*	09496-8.4	496	512.8	8.4	
*	09498-7	498	512	7	
*	09499-3.53	499	506.06	3.53	
*	09499.3-3.1	499.3	505.5	3.1	Gs-500
*	02500	499.3	510.7	5.7	G-500
*	01500	499.5	516.3	8.4	P-500
*	09500-3	500	506	3	
*	09500-4	500	508	4	
*	09500-5	500	510	5	
*	09500-6	500	512	6	
*	09500-8	500	516	8	
*	09500-10	500	520	10	
*	09500-11	500	522	11	


	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09500-12	500	524	12	
*	09504-5.33	504	514.66	5.33	
*	02505	504.3	515.7	5.7	G-505
*	01505	504.5	521.3	8.4	P-505
*	09504.5-10	504.5	524.5	10	V-510
*	09505-4	505	513	4	
	08389	506.86	517.52	5.33	AS-389
	08469	506.86	520.84	6.99	AS-469
*	09506.98-3.53	506.98	514.04	3.53	
*	09508-4	508	516	4	
*	09508-7	508	522	7	
*	09508-8	508	524	8	
*	09508-8.4	508	524.8	8.4	
*	09509.27-3.53	509.27	516.33	3.53	
*	02510	509.3	520.7	5.7	G-510
*	01510	509.5	526.3	8.4	P-510
*	09510-3	510	516	3	
*	09510-3.53	510	517.06	3.53	
*	09510-4	510	518	4	
*	09510-5	510	520	5	
*	09510-6	510	522	6	
*	09510-6.99	510	523.98	6.99	
*	09510-10	510	530	10	
*	09512-3.85	512	519.7	3.85	
*	09512-4.5	512	521	4.5	
*	09513-6	513	525	6	
*	09513-11	513	535	11	
*	09513.4-3.5	513.4	520.4	3.5	
*	09514-7	514	528	7	
*	09514-9	514	532	9	
*	02515	514.3	525.7	5.7	G-515
*	01515	514.5	531.3	8.4	P-515
*	09514.5-10	514.5	534.5	10	V-520
*	09515-5	515	525	5	
*	09515-6	515	527	6	
*	09515-8	515	531	8	
*	09518.5-3	518.5	524.5	3	
*	09519-7	519	533	7	
*	02520	519.3	530.7	5.7	G-520
*	01520	519.5	536.3	8.4	P-520

\* 符號代表國際規範外， 加耐力公司的特別尺寸 (\* means CNL special design outside the international standard specifications)



# O環尺寸表 (依內徑排序)

## O-Ring Size List (Inner Diameter List)

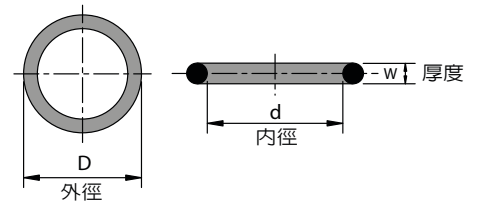

材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09520-4	520	528	4	
*	09520-6	520	532	6	
*	09520-7	520	534	7	
*	09520-8	520	536	8	
*	02525	524.3	535.7	5.7	G-525
*	01525	524.5	541.3	8.4	P-525
	09524.5-10	524.5	544.5	10	V-530
*	09525-3	525	531	3	
*	09525-3.1	525	531.2	3.1	
*	09525-4	525	533	4	
*	09525-5	525	535	5	
*	09525-6	525	537	6	
*	09525-7	525	539	7	
*	09525-8	525	541	8	
*	09525-12	525	549	12	
*	09526-8.4	526	542.8	8.4	
*	09528-5	528	538	5	
*	02530	529.3	540.7	5.7	G-530
*	01530	529.5	546.3	8.4	P-530
*	09530-3	530	536	3	
*	09530-5	530	540	5	
*	09530-5.3	530	540.6	5.3	
*	09531.56-4	531.56	539.56	4	
	08390	532.26	542.92	5.33	AS-390
	08470	532.26	546.24	6.99	AS-470
*	09534-10	534	554	10	V-540
*	02535	534.3	545.7	5.7	G-535
*	01535	534.5	551.3	8.4	P-535
*	09535-6	535	547	6	
*	02540	539.3	550.7	5.7	G-540
*	01540	539.5	556.3	8.4	P-540
*	09540-3	540	546	3	
*	09540-4	540	548	4	
*	09540-5	540	550	5	
*	09540-6	540	552	6	
*	09540-7	540	554	7	
*	09540-8	540	556	8	
*	09544-10	544	564	10	V-550
*	02545	544.3	555.7	5.7	G-545
*	01545	544.5	561.3	8.4	P-545

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09545-6	545	557	6	
*	09545-8	545	561	8	
*	09545.9-8	545.9	561.9	8	
*	09546-7.7	546	561.4	7.7	
*	02550	549.3	560.7	5.7	G-550
*	01550	549.5	566.3	8.4	P-550
*	09550-4	550	558	4	
*	09550-8.4	550	566.8	8.4	
*	09550-10	550	570	10	
*	09551-4	551	559	4	
*	09552-8	552	568	8	
*	09554-10	554	574	10	V-560
*	02555	554.3	565.7	5.7	G-555
*	01555	554.5	571.3	8.4	P-555
	08391	557.66	568.32	5.33	AS-391
	08471	557.66	571.64	6.99	AS-471
*	09558-5.7	558	569.4	5.7	
*	09558-7.2	558	572.4	7.2	
*	02560	559.3	570.7	5.7	G-560
*	01560	559.5	576.3	8.4	P-560
*	09560-4	560	568	4	
*	09560-5	560	570	5	
*	09560-6	560	572	6	
*	09560-7	560	574	7	
*	09564-10	564	584	10	V-570
*	02565	564.3	575.7	5.7	G-565
*	01565	564.5	581.3	8.4	P-565
*	09565-3	565	571	3	
*	09565-7	565	579	7	
*	09568.5-6.99	568.5	582.48	6.99	
*	09568.6-8.4	568.6	585.4	8.4	
*	09569-10	569	589	10	
*	09569.27-7	569.27	583.27	7	
*	02570	569.3	580.7	5.7	G-570
*	01570	569.5	586.3	8.4	P-570
*	09570-5	570	580	5	
*	09570-6	570	582	6	
*	09574-10	574	594	10	V-580
*	02575	574.3	585.7	5.7	G-575
*	01575	574.5	591.3	8.4	P-575

\* 符號代表國際規範外， 加耐力公司的特別尺寸 (\* means CNL special design outside the international standard specifications)



材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09579-2.5	579	584	2.5	
	09579-10	579	599	10	V-585
*	02580	579.3	590.7	5.7	G-580
*	01580	579.5	596.3	8.4	P-580
*	09580-3	580	586	3	
*	09580-4	580	588	4	
*	09580-5	580	590	5	
*	09580-6	580	592	6	
*	09580-8	580	596	8	
*	09582-11	582	604	11	
	08392	582.65	593.31	5.33	AS-392
	08472	582.65	596.63	6.99	AS-472
*	09584-10	584	604	10	V-590
*	02585	584.3	595.7	5.7	G-585
*	01585	584.5	601.3	8.4	P-585
*	09585-4	585	593	4	
*	09585-5	585	595	5	
*	09588.3-7.2	588.3	602.7	7.2	
*	09589-6.99	589	602.98	6.99	
*	02590	589.3	600.7	5.7	G-590
*	01590	589.5	606.3	8.4	P-590
*	09590-4	590	598	4	
*	09590-5	590	600	5	
*	09590-7	590	604	7	
*	09590-12	590	614	12	
*	09593-10	593	613	10	V-600
*	02595	594.3	605.7	5.7	G-595
*	01595	594.5	611.3	8.4	P-595
*	09595-3.53	595	602.06	3.53	
*	09595-16	595	627	16	
*	09596.22-7	596.22	610.22	7	
*	09598-3	598	604	3	
*	09598.83-3.53	598.83	605.89	3.53	
*	02600	599.3	610.7	5.7	G-600
*	01600	599.5	616.3	8.4	P-600
*	09600-4	600	608	4	
*	09600-6	600	612	6	
*	09600-8.4	600	616.8	8.4	
*	09600-12	600	624	12	
*	09602-5.33	602	612.66	5.33	

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09603.5-10	603.5	623.5	10	V-610
*	09607-8	607	623	8	
	08393	608.1	618.76	5.33	AS-393
	08473	608.1	622.08	6.99	AS-473
*	02610	609.3	620.7	5.7	G-610
*	01610	609.5	626.3	8.4	P-610
*	09610-10	610	630	10	
*	09612-4	612	620	4	
*	09613-11	613	635	11	
*	09613.5-10	613.5	633.5	10	V-620
*	09615-6	615	627	6	
*	09615-9	615	633	9	
*	02620	619.3	630.7	5.7	G-620
*	01620	619.5	636.3	8.4	P-620
*	09620-10	620	640	10	
*	09623-7	623	637	7	
*	09623.5-10	623.5	643.5	10	V-630
*	09625-3	625	631	3	
*	02630	629.3	640.7	5.7	G-630
*	01630	629.5	646.3	8.4	P-630
*	09630-5	630	640	5	
*	09630-8	630	646	8	
*	09630-10	630	650	10	
*	09633-7	633	647	7	
	08394	633.5	644.16	5.33	AS-394
	08474	633.5	647.48	6.99	AS-474
	09633.5-10	633.5	653.5	10	V-640
*	02640	639.3	650.7	5.7	G-640
*	01640	639.5	656.3	8.4	P-640
*	09640-3	640	646	3	
*	09640-7	640	654	7	
*	09643-5.3	643	653.6	5.3	
*	09643-10	643	663	10	V-650
*	02650	649.3	660.7	5.7	G-650
*	01650	649.5	666.3	8.4	P-650
*	09650-6	650	662	6	
*	09652.6-6	652.6	664.6	6	
*	09653-10	653	673	10	V-660
*	09655-4	655	663	4	
*	09657-4	657	665	4	

O 環 尺 寸

\* 符號代表國際規範外， 加耐力公司的特別尺寸 (\* means CNL special design outside the international standard specifications)