




# O環尺寸表 (依內徑排序)

## O-Ring Size List (Inner Diameter List)

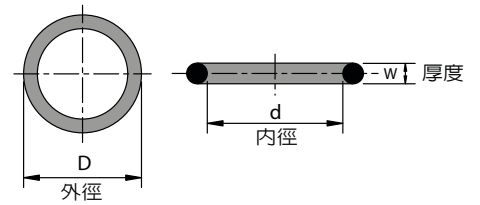

材質	JIS 記號	1種 A	1種 B	3種	4種 C	4種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09026.8-2.5	26.8	31.8	2.5	
*	09027-1	27	29	1	
*	09027-1.5	27	30	1.5	
*	09027-2	27	31	2	
*	09027-2.5	27	32	2.5	
*	09027-3	27	33	3	
*	09027-3.5	27	34	3.5	
*	09027-4	27	35	4	
*	09027-4.5	27	36	4.5	
*	09027-5	27	37	5	
*	09027-6	27	39	6	
*	09027.2-1	27.2	29.2	1	
*	09027.2-2.5	27.2	32.2	2.5	
*	09027.5-1	27.5	29.5	1	
*	09027.5-1.5	27.5	30.5	1.5	
	04028	27.5	31.5	2	S-28
*	09027.5-3	27.5	33.5	3	
*	09027.5-4	27.5	35.5	4	V-28
	071028	27.7	31.5	1.9	JASO-1028
	072028	27.7	32.5	2.4	JASO-2028
	01028	27.7	34.7	3.5	P-28
*	09027.8-3.6	27.8	35	3.6	
	08320	27.94	38.6	5.33	AS-320
*	09028-1	28	30	1	
*	09028-1.2	28	30.4	1.2	
*	09028-1.5	28	31	1.5	
*	09028-2	28	32	2	
*	09028-2.4	28	32.8	2.4	
*	09028-2.5	28	33	2.5	
*	09028-3	28	34	3	
*	09028-3.5	28	35	3.5	
*	09028-4	28	36	4	
*	09028-4.5	28	37	4.5	
*	09028-5	28	38	5	
*	09028-6	28	40	6	
	08216	28.17	35.23	3.53	AS-216
	08122	28.25	33.49	2.62	AS-122
	08024	28.3	31.86	1.78	AS-024
	04029	28.5	32.5	2	S-29
*	09028.5-3	28.5	34.5	3	

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
	01029	28.7	35.7	3.5	P-29
*	09028.8-2.5	28.8	33.8	2.5	
*	09029-1	29	31	1	
*	09029-1.5	29	32	1.5	
*	09029-2	29	33	2	
*	09029-2.5	29	34	2.5	
*	09029-3	29	35	3	
*	09029-3.5	29	36	3.5	
*	09029-4	29	37	4	
*	09029-4.5	29	38	4.5	
*	09029-5	29	39	5	
*	09029-6	29	41	6	
*	09029-8	29	45	8	
*	09029.2-3	29.2	35.2	3	
	01029.5	29.2	36.2	3.5	P-29.5
*	09029.3-3.6	29.3	36.5	3.6	
*	09029.4-1	29.4	31.4	1	
	02030	29.4	35.6	3.1	G-30
	04030	29.5	33.5	2	S-30
*	09029.5-2.5	29.5	34.5	2.5	
*	09029.5-4	29.5	37.5	4	V-30
	08321	29.51	40.17	5.33	AS-321
	071030	29.7	33.5	1.9	JASO-1030
	072030	29.7	34.5	2.4	JASO-2030
*	09029.7-2.5	29.7	34.7	2.5	
*	09029.7-3.2	29.7	36.1	3.2	
	01030	29.7	36.7	3.5	P-30
	08916	29.75	35.65	2.95	AS-916
	08217	29.75	36.81	3.53	AS-217
*	09029.8-1	29.8	31.8	1	
	08123	29.82	35.06	2.62	AS-123
	08025	29.87	33.43	1.78	AS-025
*	09030-1	30	32	1	
*	09030-1.5	30	33	1.5	
*	09030-2	30	34	2	
*	09030-2.2	30	34.4	2.2	
*	09030-2.5	30	35	2.5	
*	09030-3	30	36	3	
*	09030-3.15	30	36.3	3.15	
*	09030-3.5	30	37	3.5	

\* 符號代表國際規範外，CNL 加耐力公司的特別尺寸 (\* means CNL special design outside the international standard specifications)



材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09030-4	30	38	4	
*	09030-4.5	30	39	4.5	
*	09030-5	30	40	5	Gm-030
*	09030-6	30	42	6	
*	09030-7	30	44	7	
*	09030.2-3	30.2	36.2	3	
*	09030.5-1	30.5	32.5	1	
*	09030.5-3.1	30.5	36.7	3.1	
	01031	30.7	37.7	3.5	P-31
*	09030.8-3	30.8	36.8	3	
*	09030.8-3.6	30.8	38	3.6	
*	09031-1	31	33	1	
*	09031-1.5	31	34	1.5	
	04031.5	31	35	2	S-31.5
*	09031-2.4	31	35.8	2.4	
*	09031-2.5	31	36	2.5	
*	09031-3	31	37	3	
*	09031-3.5	31	38	3.5	
*	09031-4	31	39	4	
*	09031-4.5	31	40	4.5	
*	09031-5	31	41	5	
*	09031-6	31	43	6	
*	09031-8	31	47	8	
*	09031.1-0.75	31.1	32.6	0.75	
	08322	31.12	41.78	5.33	AS-322
	071031	31.2	35	1.9	JASO-1031
	072031	31.2	36	2.4	JASO-2031
	01031.5	31.2	38.2	3.5	P-31.5
*	09031.3-1	31.3	33.3	1	
	08218	31.34	38.4	3.53	AS-218
	08124	31.42	36.66	2.62	AS-124
	08026	31.47	35.03	1.78	AS-026
*	09031.5-0.8	31.5	33.1	0.8	
*	09031.5-1.5	31.5	34.5	1.5	
	04032	31.5	35.5	2	S-32
*	09031.5-2.5	31.5	36.5	2.5	
*	09031.5-3	31.5	37.5	3	
*	09031.5-4	31.5	39.5	4	V-32
*	09031.7-2.4	31.7	36.5	2.4	
	01032	31.7	38.7	3.5	P-32

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09031.8-2.4	31.8	36.6	2.4	
*	09031.8-2.5	31.8	36.8	2.5	
*	09032-1	32	34	1	
*	09032-1.5	32	35	1.5	
*	09032-2	32	36	2	
*	09032-2.5	32	37	2.5	
*	09032-3	32	38	3	
*	09032-3.5	32	39	3.5	
*	09032-4	32	40	4	
*	09032-4.5	32	41	4.5	
*	09032-5	32	42	5	
*	09032-6	32	44	6	
*	09032-7	32	46	7	
*	09032.3-3	32.3	38.3	3	
*	09032.5-1.5	32.5	35.5	1.5	
*	09032.5-2	32.5	36.5	2	
*	09032.5-3	32.5	38.5	3	
*	09032.5-3.6	32.5	39.7	3.6	
	08323	32.69	43.35	5.33	AS-323
*	09032.7-3.5	32.7	39.7	3.5	
*	09032.8-4	32.8	40.8	4	
	08219	32.92	39.98	3.53	AS-219
	08125	32.99	38.23	2.62	AS-125
*	09033-1	33	35	1	
*	09033-1.5	33	36	1.5	
*	09033-2	33	37	2	
*	09033-2.5	33	38	2.5	
*	09033-3	33	39	3	
*	09033-4	33	41	4	
*	09033-4.5	33	42	4.5	
*	09033-5	33	43	5	
*	09033-6	33	45	6	
	08027	33.05	36.61	1.78	AS-027
	071033	33.2	37	1.9	JASO-1033
	072033	33.2	38	2.4	JASO-2033
	04034	33.5	37.5	2	S-34
*	09033.5-2.5	33.5	38.5	2.5	
*	09033.5-3	33.5	39.5	3	
*	09033.5-3.15	33.5	39.8	3.15	
	09033.5-4	33.5	41.5	4	V-34


O 環 尺 寸

\* 符號代表國際規範外，加耐力公司的特別尺寸 (\* means CNL special design outside the international standard specifications)



# O環尺寸表 (依內徑排序)

## O-Ring Size List (Inner Diameter List)

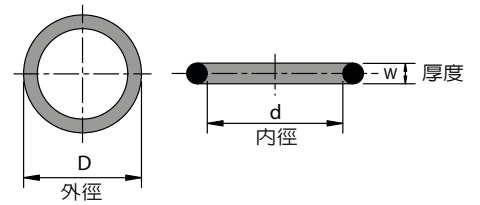

材質	JIS 記號	1種 A	1種 B	3種	4種 C	4種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09033.6-1.78	33.6	37.16	1.78	
	01034	33.7	40.7	3.5	P-34
*	09033.7-4.8	33.7	43.3	4.8	
*	09034-1	34	36	1	
*	09034-1.5	34	37	1.5	
*	09034-2	34	38	2	
*	09034-2.3	34	38.6	2.3	
*	09034-2.4	34	38.8	2.4	
*	09034-2.5	34	39	2.5	
*	09034-3	34	40	3	
*	09034-3.5	34	41	3.5	
*	09034-4	34	42	4	
*	09034-4.5	34	43	4.5	
*	09034-5	34	44	5	
*	09034-6	34	46	6	
*	09034.1-3.6	34.1	41.3	3.6	
*	09034.2-3	34.2	40.2	3	
	08324	34.29	44.95	5.33	AS-324
	02035	34.4	40.6	3.1	G-35
	08918	34.42	40.32	2.95	AS-918
*	09034.5-1.2	34.5	36.9	1.2	
	04035	34.5	38.5	2	S-35
*	09034.5-3	34.5	40.5	3	
*	09034.5-4	34.5	42.5	4	V-35
	08220	34.52	41.58	3.53	AS-220
	08126	34.6	39.84	2.62	AS-126
*	09034.6-5	34.6	44.6	5	
	08028	34.65	38.21	1.78	AS-028
	01035	34.7	41.7	3.5	P-35
*	09034.8-2.5	34.8	39.8	2.5	
*	09035-1	35	37	1	
*	09035-1.5	35	38	1.5	
	04035.5	35	39	2	S-35.5
*	09035-2.5	35	40	2.5	
*	09035-3	35	41	3	
*	09035-3.5	35	42	3.5	
*	09035-4	35	43	4	
*	09035-4.5	35	44	4.5	
*	09035-5	35	45	5	Gm-035
*	09035-6	35	47	6	

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09035-10	35	55	10	
*	09035.1-1.6	35.1	38.3	1.6	
	071035	35.2	39	1.9	JASO-1035
	072035	35.2	40	2.4	JASO-2035
	01035.5	35.2	42.2	3.5	P-35.5
	04036	35.5	39.5	2	S-36
*	09035.5-4	35.5	43.5	4	V-36
*	09035.6-3.6	35.6	42.8	3.6	
*	09035.6-4.2	35.6	44	4.2	
	01036	35.7	42.7	3.5	P-36
*	09035.8-2.5	35.8	40.8	2.5	
*	09035.8-3	35.8	41.8	3	
*	09035.85-1.9	35.85	39.65	1.9	
*	09035.9-2.5	35.9	40.9	2.5	
*	09036-1	36	38	1	
*	09036-1.2	36	38.4	1.2	
*	09036-1.5	36	39	1.5	
*	09036-2	36	40	2	
*	09036-2.5	36	41	2.5	
*	09036-3	36	42	3	
*	09036-4	36	44	4	
*	09036-4.5	36	45	4.5	
*	09036-5	36	46	5	
*	09036-6	36	48	6	
*	09036-8	36	52	8	
	08221	36.1	43.16	3.53	AS-221
	08127	36.17	41.41	2.62	AS-127
*	09036.2-6	36.2	48.2	6	
*	04037	36.5	40.5	2	S-37
*	09036.5-2.4	36.5	41.3	2.4	
*	09036.5-3	36.5	42.5	3	
*	09037-1	37	39	1	
*	09037-1.5	37	40	1.5	
*	09037-1.8	37	40.6	1.8	
*	09037-2	37	41	2	
*	09037-2.5	37	42	2.5	
*	09037-3	37	43	3	
*	09037-3.5	37	44	3.5	
*	09037-4	37	45	4	
*	09037-4.5	37	46	4.5	

\* 符號代表國際規範外，加耐力公司的特別尺寸 (\* means CNL special design outside the international standard specifications)